



GENEREL INFORMATION

Systemeffekt:	9W
Spredningsvinkel:	Asymmetrisk
Farvetemperatur:	2700 / 3000 / 3500K
Total lysstrøm:	430lm / 453lm / 463lm
Armatur virkningsgrad:	48 lm/W / 50lm/W / 51lm/W
Armatur farve:	<input type="checkbox"/> H <input checked="" type="checkbox"/> S
Armatur materiale:	aluminium
Omgivelsestemperatur:	Max 35°
Kapslingsklasse:	IP20
Isolationsklasse:	Klasse I
Netfrekvens:	50Hz
CRI:	>80
Spænding:	220-240VAC
Energiklasse:	A++ - A
Driver:	Inkluderet
Dæmpning:	Nej
Middellevetid Ta35:	50.000 timer
Drejbar:	350°
Hovedtilt:	90°
Dimensioner:	Se tegning
Tilslutning:	Volare Diretta (2-faset)
Produkt nr:	Hvid / 2700K 24-0220-000167 Hvid / 3000K 24-0220-000168 Hvid / 3500K 24-0220-000169 Sort / 2700K 24-0220-000170 Sort / 3000K 24-0220-000171 Sort / 3500K 24-0220-000172




MÅL OG SPECIFIKATIONER




350°



90°

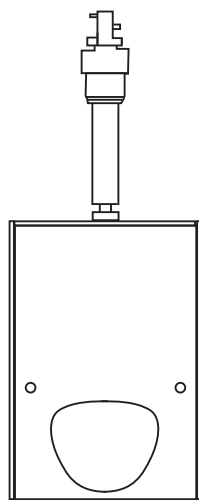

64

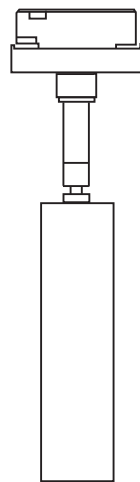

25

100

156