

NERO



UDENDØRS

GENERAL INFORMATION



	NERO S	NERO T	
Systemeffekt:	8W	8W	
Spredningsvinkel:	60°	60°	
Farvetemperatur:	3000 / 4000K	3000 / 4000K	
Total lysstrøm:	350lm	350lm	
Armaturvirkningsgrad:	44lm/W	44lm/W	
Armaturfarve:	G	G	
Armaturmateriale:	Aluminium	Aluminium	
Afskærmning:	Opal	Opal	
Omgivelsestemperatur:	-25° ~50°	-25° ~50°	
Kapslingsklasse:	IP65	IP65	
Vandalklasse:	IK06	IK06	
Isolationsklasse:	Klasse II	Klasse II	
Netfrekvens:	50Hz	50Hz	
CRI:	>70	>70	
Spænding:	100-277VAC	100-277VAC	
Effekt faktor:	>0,9	>0,9	
Dæmpning:	Nej	Nej	
Middellevetid L70B50:	>30.000 timer	>30.000 timer	
Vægt:	1,4 kg	3,0 kg	
Dimensioner (mm):	H:400 x Ø:209	H:800 x Ø209	
Tilslutning:	I bund	I bund	
Produkt nr:	3000K 4000K	01-0140-000005 01-0140-000009	01-0140-000006 01-0140-000010



LIGHT INNOVATION TECHNOLOGY

MÅL OG SPECIFIKATIONER

NERO SHORT

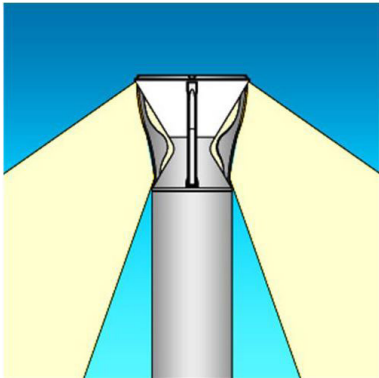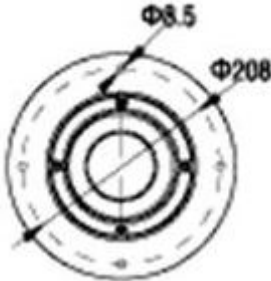

NERO TALL

