






GENEREL INFORMATION

Systemeffekt:	60W	80W	130W	160W	
Spredningsvinkel:	90°	90°	120°	120°	
Farvetemperatur:	3000 / 4000 / 5000K	3000 / 4000 / 5000K	3000 / 4000 / 5000K	3000 / 4000 / 5000K	
Total lysstrøm:	6600lm (4000K)	9600lm (4000K)	14.000lm (4000K)	18.000lm (4000K)	
Armaturvirkningsgrad:	ca. 103lm/W	ca. 108lm/W	ca. 108lm/W	ca. 110lm/W	
Armaturfarve:	G	G	G	G	
Armaturmateriale:	Trykstøbt aluminium	Trykstøbt aluminium	Trykstøbt aluminium	Trykstøbt aluminium	
Omgivelsestemperatur:	-40°~55°	-40°~55°	-40°~55°	-40°~55°	
Kapslingsklasse:	IP65	IP65	IP65	IP65	
Isolationsklasse:	Klasse I	Klasse I	Klasse I	Klasse I	
Netfrekvens:	50Hz	50Hz	50Hz	50Hz	
RA-værdi:	>75	>75	>75	>75	
Spænding:	220-240VAC	220-240VAC	220-240VAC	220-240VAC	
Effekt faktor:	>0,95	>0,95	>0,95	>0,95	
Chip:	Bridgelux COB	Bridgelux COB	Bridgelux COB	Bridgelux COB	
Driver:	Meanwell	Meanwell	Meanwell	Meanwell	
Dæmpning:	Nej	Nej	Nej	Nej	
Middellevetid L80:	50.000 timer	50.000 timer	50.000 timer	50.000 timer	
Vægt:	4,8 kg	4,8 kg	14 kg	14 kg	
Dimensioner (mm):	L:350 x B:295 x H:100	L:350 x B:295 x H:100	L:420 x B:380 x H:125	L:420 x B:380 x H:125	
Tilslutning:	Max 3x1mm ²	Max 3x1mm ²	Max 3x1mm ²	Max 3x1mm ²	
Leveret med kabel:	Ja	Ja	Ja	Ja	
THD:	>9%	>9%	>9%	>9%	
Produkt nr:	3000K 4000K 5000K	08-0190-000010 08-0190-000004 08-0190-000011	08-0190-000012 08-0190-000005 08-0190-000013	08-0190-000001 08-0190-000014 08-0190-000015	08-0190-000016 08-0190-000002 08-0190-000017



LIGHT INNOVATION TECHNOLOGY

MÅL OG SPECIFIKATIONER

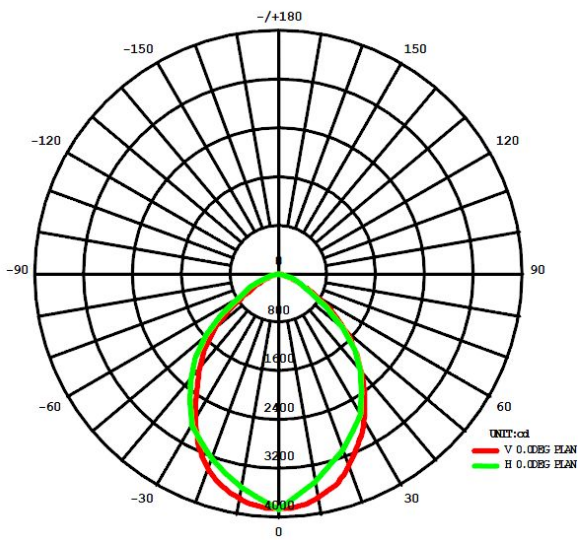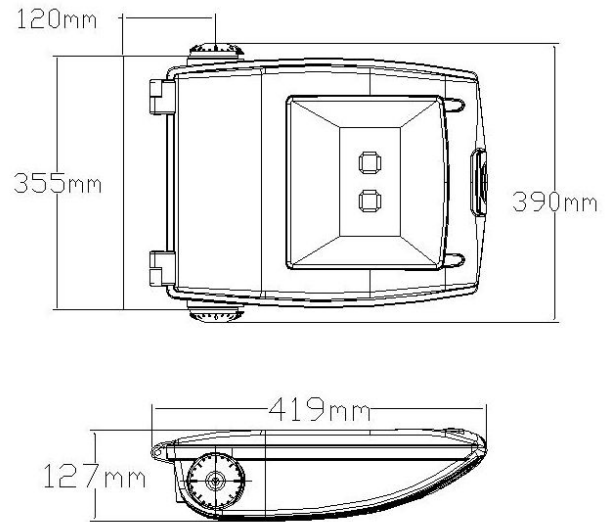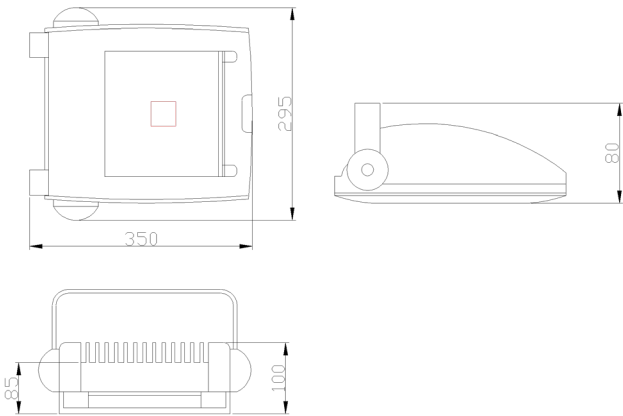

6.0m	48.70/107.11x	1069.24cm
7.0m	35.78/78.711x	1247.45cm
8.0m	27.40/60.261x	1425.65cm
9.0m	21.65/47.611x	1603.86cm
10.0m	17.53/38.571x	1782.07cm



LIGHT INNOVATION TECHNOLOGY